


TXP Series

Intelligent Interactive LED Display

- > Supporting 20 points touch electronic white board.
- > Built-in exquisite demonstration & welcome template.
- > Support Android & Windows to adopt different meeting request.
- > Built-in video conference APK to support HD remote online conference.
- > Support multiple format and USB file read and displayed directly.
- > Go with video bar, floor-standing etc as options for different meeting rooms.



Viewer-friendly

High refresh rates for smooth visuals, and adjustable brightness levels for optimal viewing comfort.



Support 4K Ultra HD Resolution Display

Available in 2K, 4K screen resolution with different pixel pitch and size.

Video Conferencing

Built-in Android system, compatible with more meeting applications as required.

Remote Control


The volume, brightness, etc. can be adjusted through the remote control.

File Management

Front USB interface, can read USB disk files, supports multiple file formats.

Interactive Annotation

Multi-touch, interactive annotation, easy to save and share meeting minutes.

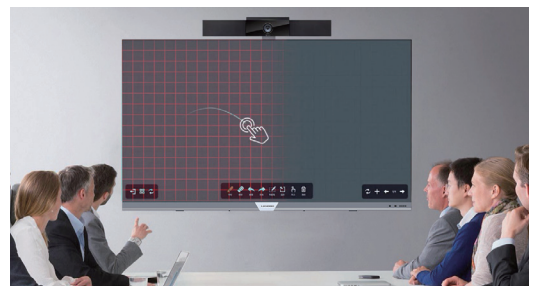

Screen Mirroring, Split Screen Display

- > Supports screen mirroring of PC, smartphone and pad.
- > Up to 9 devices when wireless screen sharing.



SPECIFICATIONS

Item	TXP108	TXP122	TXP135	TXP162
Panel SPEC				
Product Type	Touch/non-Touch	Touch/non-Touch	Touch/non-Touch	Touch/non-Touch
Screen Diagonal (inches)	108 (16:9)	122 (16:9)	135 (16:9)	162 (16:9)
Screen Size (WxH) (mm)	2400x1350	2700x1518.75	3000x1687.5	3600x2025
Display Resolution	2K	2K	2K	2K / 4K
Pixel Pitch (mm)	P1.25 (Micro LED)	P1.40625 (Micro LED)	P1.5625 (Micro LED)	P1.875 (Micro LED) / P0.9375 (Micro LED)
Brightness	≤600nit Adjustable	≤600nit Adjustable	≤600nit Adjustable	≤600nit Adjustable
Brightness Uniformity	≥98%	≥98%	≥98%	≥98%
Viewing Angle	170°(H) 170°(V)	170°(H) 170°(V)	170°(H) 170°(V)	170°(H) 170°(V)
LED MTBF	≥100000h	≥100000h	≥100000h	≥100000h
Outline SPEC				
Outline Dimensions (WxH) (mm)	2432x1456x86.5	2732x1625x86.5	3032x1793.5x86.5	3632x2131x86.5
Weight (Kg)	70±5	85±5	105±5	140±5
Avg. Power Consumption (Kw)	≤0.57	≤0.6	≤0.75	≤1.2
Cabinet Material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
Maintenance Method	Front Maintenance	Front Maintenance	Front Maintenance	Front Maintenance
Installation Method	Wall Mounted (Floor Standing optional)			
System				
	Android		OPS (optional)	
CPU	Amlogic 311D2 (Cortex-A73 x4 + Cortex-A53 x4)		I5 1135G7	
GPU	ARM Mali-G52 x8		intel UHD Graphics	
Android	Android 11.0		Windows 10	
DDR4/RAM	4G		8G	
eMMC/Flash	32G		128G SSD	
Video input	HDMI2.1 x1 HDMI2.0 x1			
Data interface	USB3.0 x 2 USB2.0 x 1 USB2.0 OTG x 1 TYPE-C x 1			

Remark: Above data is subject to change without prior notice



LEYARD HONG KONG INTERNATIONAL CO., LIMITED

Leyard Southern LED Industrial Park, No.6, Guanhe Rd, Longhua District, Shenzhen, China
Email: intlmarketing@leyard.com | Website: www.leyardhk.com